




RETAIL



Region	north
Bldg Type	Non-residential
Variant	Nuanced
Age Class	1995-2001
Rel Anzahl	0.91
NLA [m²]	962.02
Height [m]	5.17
storeys a.g.	1.74
storeys b.g.	1.0

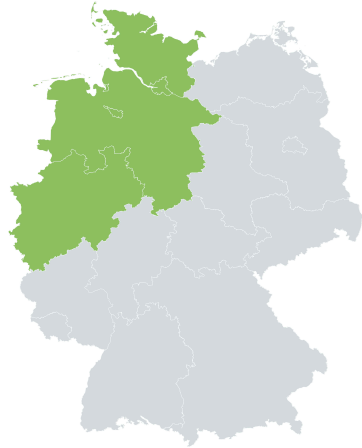

Exterior Wall

Type: massive

U [W/m²K]: 0.54

Layer	Material Name	t_i [cm]	ρ_i [kg/m³]	λ_i [W/mK]	c_i [J/kgK]	EPD ₁	EPD ₂
0	interior plaster	1	1400	0.7	850	5	-
1	reinforced concrete	22	2400	2.1	776	6	-
2	mineral wool	6.11	60	0.04	850	3	-
3	concrete	6	2400	2.1	776	6	-
4	exterior plaster	2	1800	0.87	850	1	-

Interior Wall

U [W/m²K]: 4.04

Layer	Material Name	t_i [cm]	ρ_i [kg/m³]	λ_i [W/mK]	c_i [J/kgK]	EPD ₁	EPD ₂
0	interior plaster	1	1400	0.7	850	5	-
1	reinforced concrete	22	2400	2.1	776	6	-
2	mineral wool	6.11	60	0.04	850	3	-
3	concrete	6	2400	2.1	776	6	-
4	exterior plaster	2	1800	0.87	850	1	-


Roof

U [W/m²K]: 0.24

Layer	Material Name	t_i [cm]	ρ_i [kg/m³]	λ_i [W/mK]	c_i [J/kgK]	EPD ₁	EPD ₂
0	concrete_CEM_II_B S325R_wz05	22	2420	2.1	1000	6	-
1	styrofoam	13.41	30	0.035	1500	10	-
2	gravel	3	750	0.19	920	7	-



RETAIL

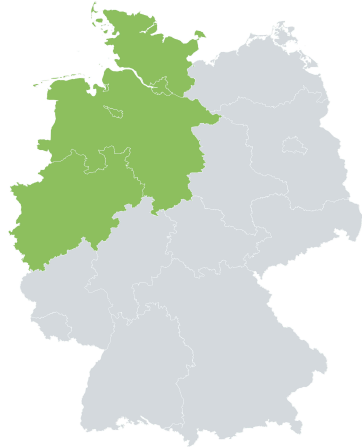

Region	north
Bldg Type	Non-residential
Variant	Nuanced
Age Class	1995-2001
Rel Anzahl	0.91
NLA [m²]	962.02
Height [m]	5.17
storeys a.g.	1.74
storeys b.g.	1.0



Foundation

U [W/m²K]: 0.35

Layer	Material Name	t_i [cm]	ρ_i [kg/m³]	λ_i [W/mK]	c_i [J/kgK]	EPD ₁	EPD ₂
0	floating cement screed	4	1940	1.4	1000	11	-
1	EPS_040_15	10	15	0.04	1500	2	-
2	concrete_CEM_II_B S325R_wz05	22.8	2420	2.1	1000	6	-

Floor

U [W/m²K]: 4.04

Layer	Material Name	t_i [cm]	ρ_i [kg/m³]	λ_i [W/mK]	c_i [J/kgK]	EPD ₁	EPD ₂
0	floating cement screed	4	1940	1.4	1000	11	-
1	EPS_040_15	6	15	0.04	1500	2	-
2	reinforced concrete	22.8	2104	1.94	776	6	-

Window System


Percentage of walls	Glazing	EPD _{Gl}	Frame type	EPD _{Fr}	Shading type	EPD _{Sh}
...	2	9	aluminium	8	-	-

Heating System

Unit type	Generator	EPD _{HEG}	Heating energy carrier	EPD _{HEC}
per_bldg	boiler_gas_large_condensing	12	gas	4



RETAIL

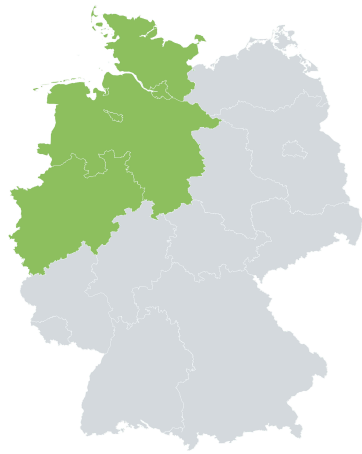

Region	north
Bldg Type	Non-residential
Variant	Nuanced
Age Class	1995-2001
Rel Anzahl	0.91
NLA [m²]	962.02
Height [m]	5.17
storeys a.g.	1.74
storeys b.g.	1.0




Façade length [m]							
N		S		E		W	
Mean	SE	Mean	SE	Mean	SE	Mean	SE
33.79	7.48	30.72	5.97	27.69	6.91	28.73	8.89

Façade area [m²]							
N		S		E		W	
Mean	SE	Mean	SE	Mean	SE	Mean	SE
178.41	42.52	161.42	32.94	148.97	39.16	155.67	50.95

EPD Summary Table

Serial No.	Full UUID	Material Name
1	004f3f4e-5bb8-4d9e-a104-6999a9e8ad5b	Gypsum lime plaster
2	205b761d-e344-49c3-a3a9-bb1bfd59b916	Expanded Polystyrene (EPS) Foam Insulation (density 15 kg/m³)
3	50d421e2-3a7b-4659-92a4-f20d6a52fcf0	Mineral wool (facade insulation)
4	84aa7483-9824-49a9-a3e3-f9fb092ea7b7	Use - 1 kWh of final energy from gas calorific value (according to GEG)
5	9a670d29-efb9-4fde-95ab-182a0b1e7280	Lime gypsum interior plaster
6	Synthetic_2	Concrete C30/37 with reinforcement steel
7	a7bad3b6-2123-483b-99b5-2ec481254be7	Gravel 2/32 (dried)
8	d0e0f205-2f4d-4c7f-b63a-23a9abd6e60a	Aluminium frame profile, powder coated
9	dcf38066-e336-46a7-b0a8-b2453dd2872d	Window glass, single
10	f2552bdf-c847-4ef8-9665-c37e8ef4d44d	Polystyrene foam filling (without binder)
11	fe371be5-c72f-4203-8569-a085ef375ba4	CALCIUM SULPHATE FLOWING SCREED AND CONVENTIONAL CALCIUM SULPHATE SCREED
12	fe91b985-60da-45dc-b3fd-29b9e632d49f	Gas condensing boiler120-400 kW (upright unit)

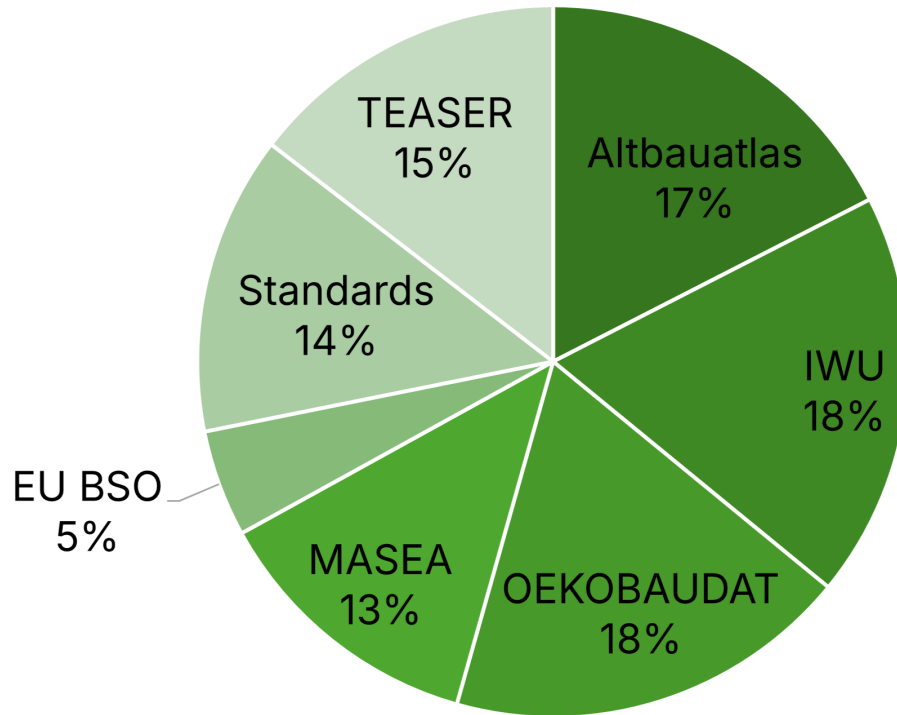

Data source	Link
Altbauatlas	https://www.altbauatlas.de/index.php
OEKOBAUDAT	https://www.oekobaudat.de/en.html
IWU	https://datenbasis.iwu.de/ https://wohngebaeuedaten2016.iwu.de/
MASEA	https://www.masea-ensan.de/
TEASER	https://ebc-tools.eonerc.rwth-aachen.de/en/teaser
EU BSO	https://building-stock-observatory.energy.ec.europa.eu/database/

* Building images are generated by AI